




# AMERICAN FLOOR PRODUCTS COMPANY, INC.

**AFCO-USA**

P.O. BOX 7055 • Gaithersburg, Maryland 20898 -7055 • 301-987-0490 • Fax 301-987-0422  
email: sales@afco-usa.com • Web Site: www.afco-usa.com

CUSTOMER P.O. #

## POTOMAC<sup>®</sup> Door Frame Guard (CG-2127)

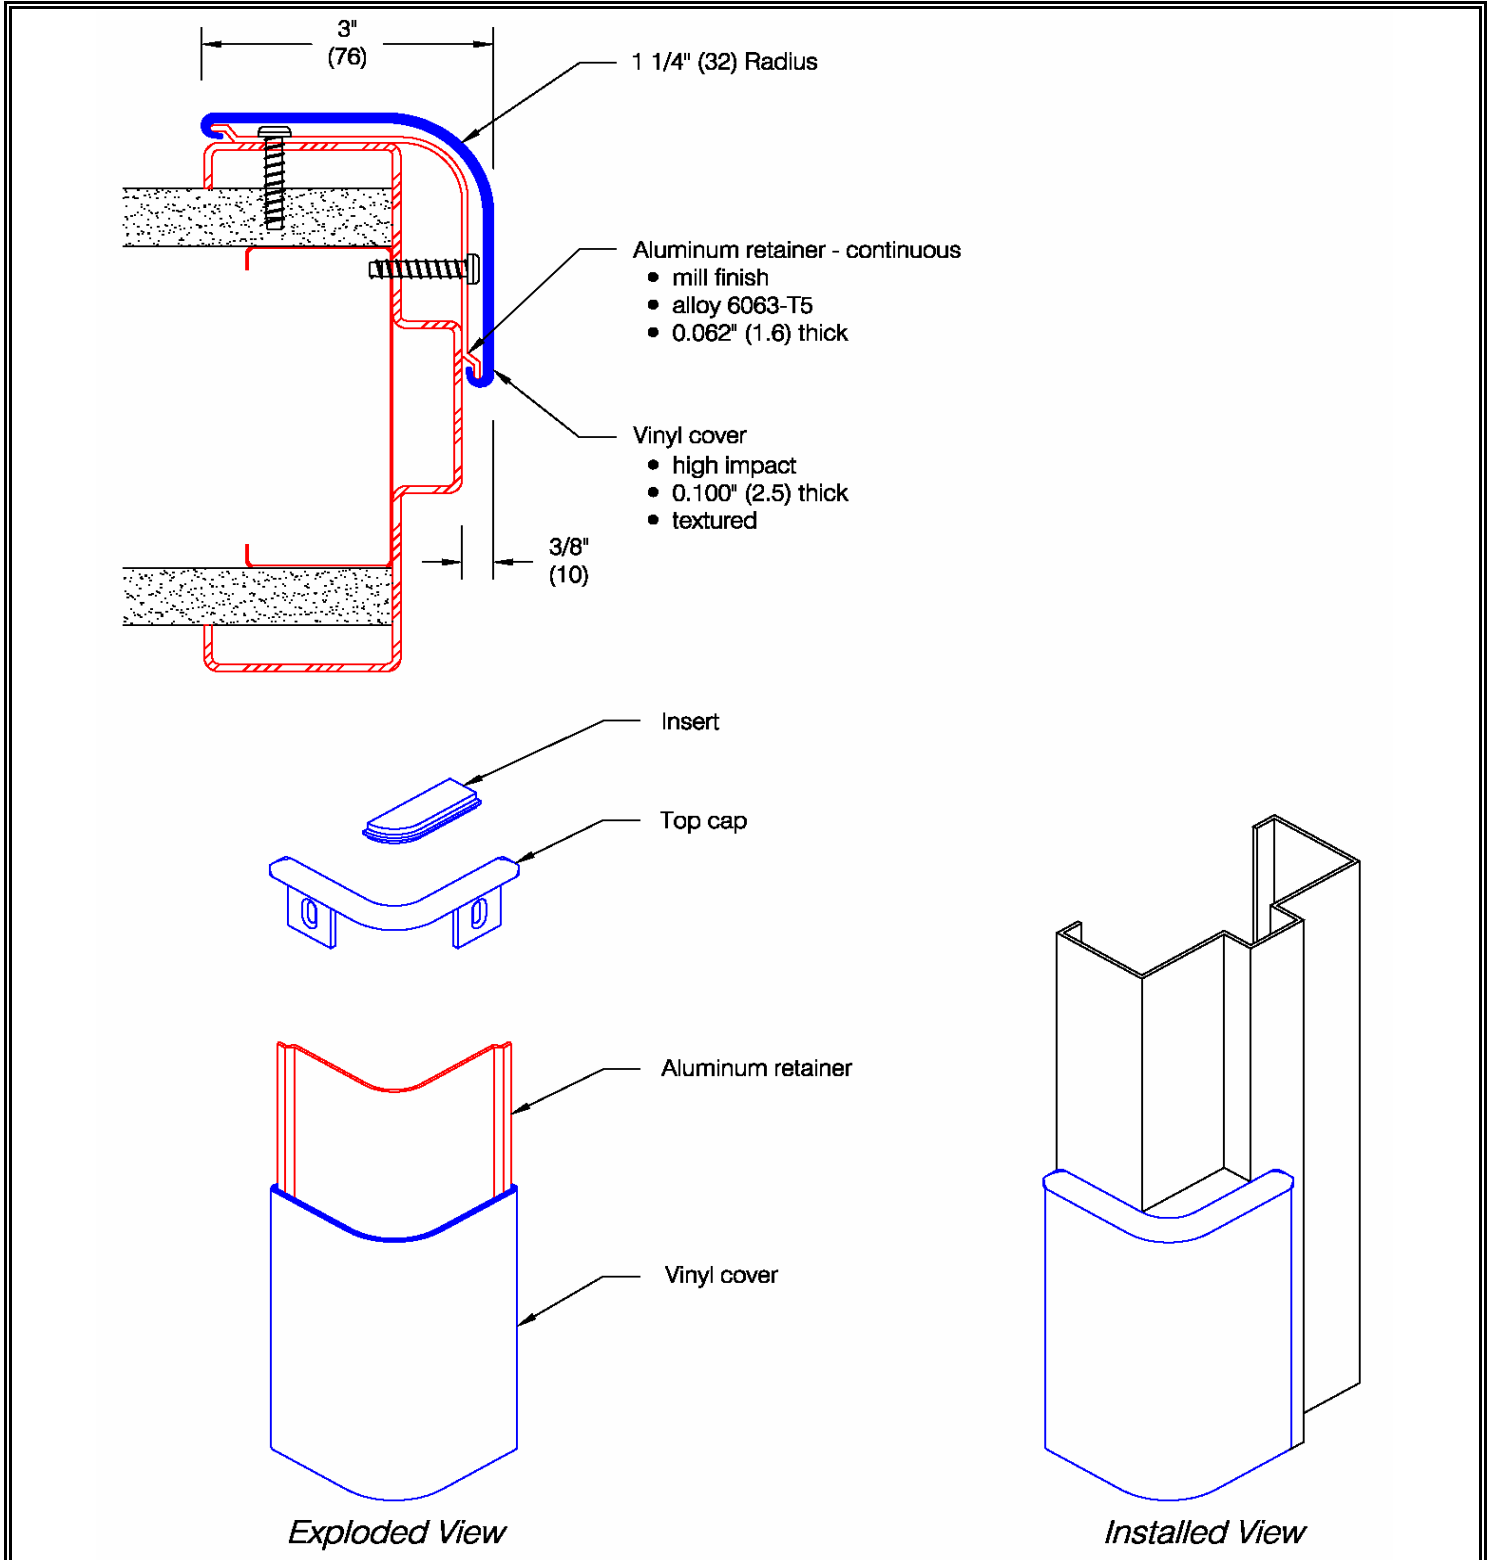

# POTOMAC<sup>®</sup> Door Frame Guard (CG-2127)

Mounting	Application	Shock absorbing	Construction	Materials	Fire rating
Surface	High abuse	25.4 ft.lbs/in. ASTM D-256	New and renovation	Vinyl Aluminum	Class A

Testing in accordance with NFPA 255 (ASTM E 84):

Class A

Flame Spread Index: 5

Smoke Developed Index: 185

<p><b>Features:</b></p> <ul style="list-style-type: none"> <li>• Class A fire rating</li> <li>• Molded top/bottom caps</li> <li>• NFPA-252 (UL 10b) approved for use on 90 minute wood and 180 minute steel fire rated door assemblies</li> <li>• Stock length: 4'-0" (1219 mm)</li> </ul>	<p><b>Finishes:</b></p> <ul style="list-style-type: none"> <li>• Manufacturer's standard colors</li> <li>• Custom colors available</li> </ul>
--	---

Corner Guard designs conform to OSHA, ANSI Life Safety, NFPA, BOCA, UBC, BOMA, ICBO, SBCCI, American Disabilities Act Accessibility Guidelines and all National Building /Code requirements.

<b>JOB NAME:</b>	<b>ITEMS</b>	<b>QUANTITY</b>
<b>JOB NUMBER:</b>	Guard Length: 4 ft.	
<b>CONTRACTOR:</b>	Color:	
<b>ARCHITECT:</b>	Top End Cap:	
<b>DEALER NAME:</b>	Bottom End Cap:	
<b>SIGNATURE:</b>	<b>Date:</b>	